


Section 17-20 Town 6 Range 7

March 30 1933

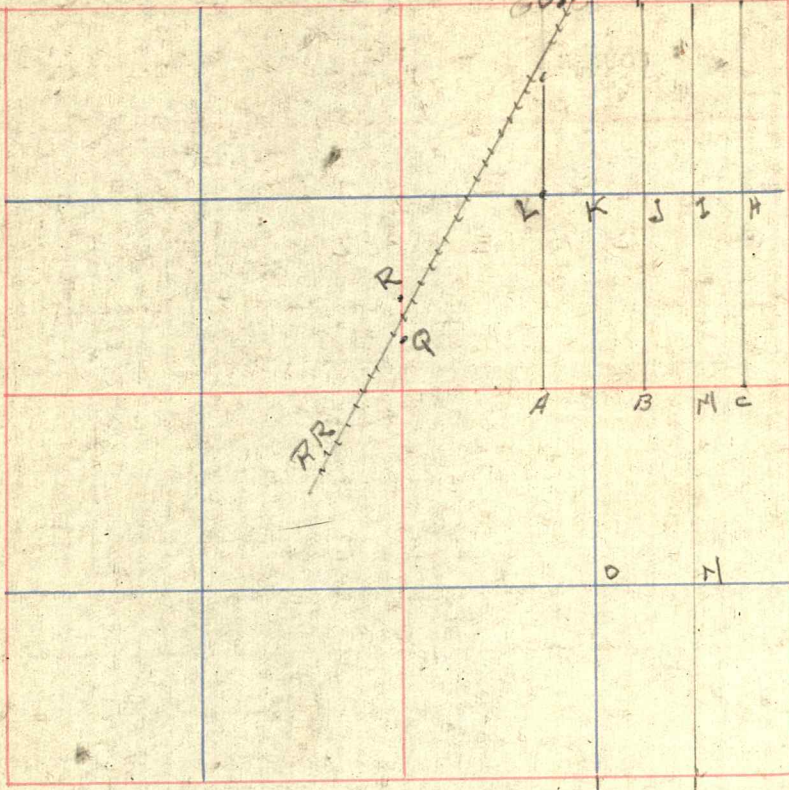

I commenced a Survey of Section 17-20 T. 6, R. 5
for Oliver Thomas et al

Frank Asbell
Bert Edwards } C. B.

W. Schmitt
Surveyor Greene County

Var.

Course.	Point of Beginning.	Chains Distance.	Corrected Bearings
Sec 17-6-5			
West	SE	2615.77 ft To S 1/4	
East	Con 1/4	1313.5 To S 1/4 NE (Stone here.)	
		2627.0 To E 1/4	
South	NE	2627.0 To E 1/4	
West	NE	2627.0 To N 1/4 (Stone here.)	
North	S 1/4 NE	2636.65 To N 1/4 NE	
North	S 1/4 SE	2638.2 To N 1/4 SE	
North	SE	2638.2 To E 1/4	
Sec 20			
South	N 1/4 NE NE	1326.3	
East	Con NE	1326.0 To E 1/4 NE	

CORNER ESTABLISHED.	Monument.	Device.	WITNESS POINTS OR BEARING TREES.	Mark or Dia. in Inches.	COURSE.	Links Distant. ft	REMARKS.
Sec 17-6-5 SE	Stone		Beech	24"	N 63° W	12.1	New wit to old Stone
	4x4"		Hick	30"	S 26 1/2° W	39.7'	
S 1/4 SE SE	Con. Post.		Maple	16"	S 16° W	6.5'	
S 1/4 SE	do		Jack Oak	18"	N 85° E	26.2'	
S 1/4	Stone		no wit.				Old stone in place.
Con SE	4x4" Con. Post		4x4" Con post		North	10.0'	
			Forked Maple	18"	S 17° E	5.0'	
S 1/4 NE SE	4x4" Con Post		4x4" Con Post		West	10.0'	
E 1/4 E 1/4	Stone		Locust	24"	South	2.9'	Nail in blaze
328.4 ft North	Stone		Old stone		South	3.55"	
E 1/4 NE	Stone		Stone		N 52° E	22.8'	
NE	Stone		No wit.				Old stone here.
N 1/4 NE	Stone		Hackberry	16"	S 6° W	44.8'	
N 1/4	"		No wit.				Old Stone here.
Con 1/4	"		" "				Old Stone here
S 1/4 NE	"		" "				Old Stone here

Stones placed at A-B-C-D-E-F-G-H-I-J-K-L-M-N-O-P-Q-R.

Sec 20-6-5							
Con NE	Stone		Con Post.	15x15"	West	15.0'	Old stone.
E 1/4 NE	"		No wit.				Old stone.
S 1/4 NE NE	4x4" Con. Post		Syc	6"	West	2.5'	
			do	16"	South	33.5'	